
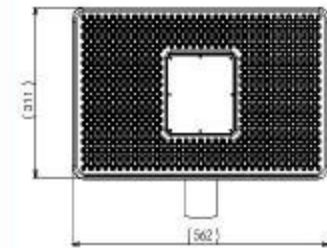



● Specification


Model No.	S02101N	S02600N
System Power Consumption	100W	60W
Luminous Flux	>5000 lm	>3000lm
Max, illumination (E max.)	>20 lux(@ 8M)	>22 lux(@ 6M)
Voltage Range	AC 100~240V 50~60Hz	
Operating Temp.	-30°C~60°C	
Carrelated Color Temperature	2800~6500K	
Weight	9 kg	
Dimensions(mm)	312 L X 562 W X 125 H	
Fixture	Die-casting aluminum housing, Anodized PC cover、UV resistance	
Life	> 50000 hrs	
Protection	IP66	

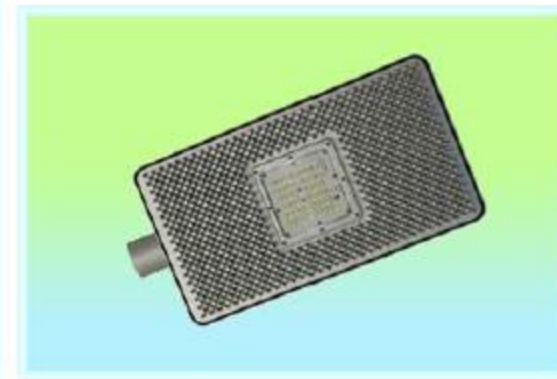

100W LED Street Light's Lux data, height, isotropic illumination distribution

Max. Lux data.


Isotropic illumination distribution

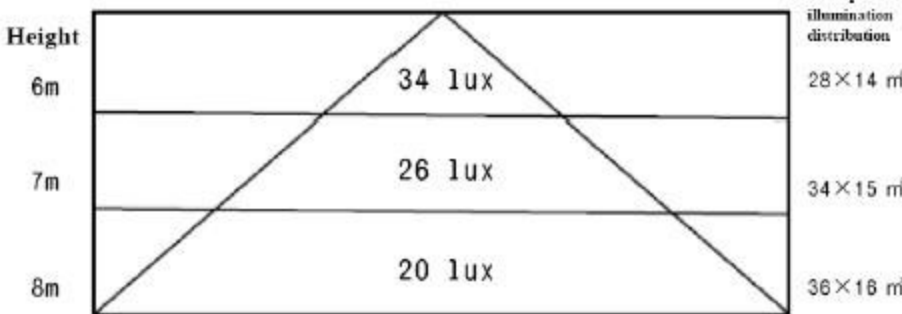


60W LED Street Light's Lux data, height, isotropic illumination distribution

Max. Lux data.

Isotropic illumination distribution

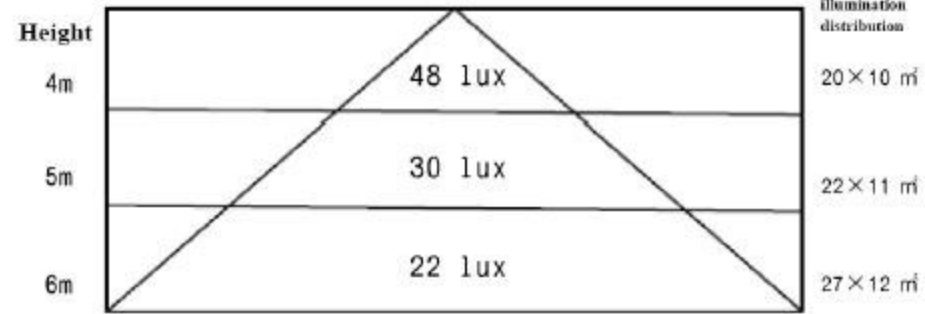

● Photometric Data S02101N

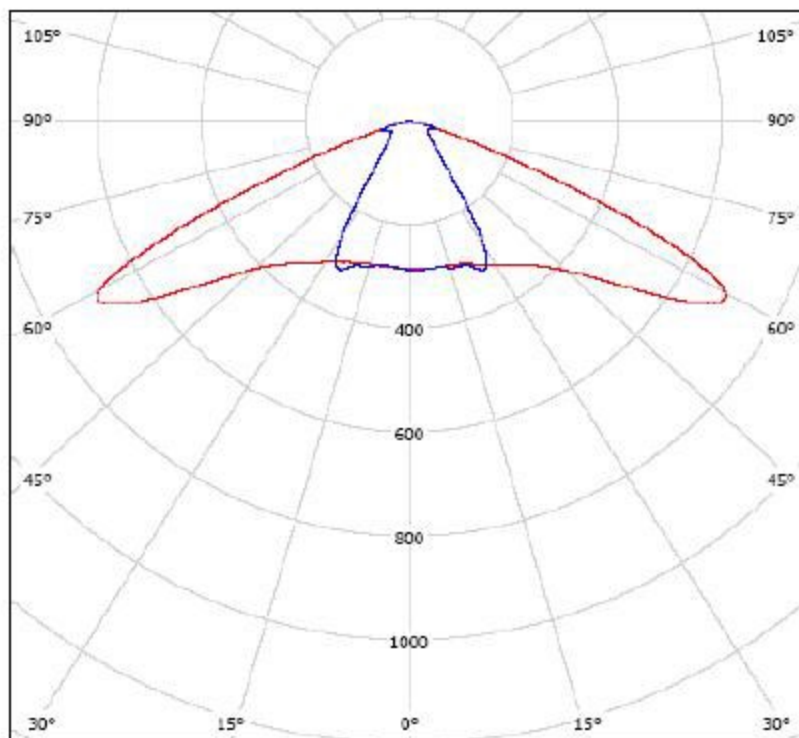

cd/klm
— C0 - C180 — C90 - C270

$\eta = 101\%$

● Isotropic illumination Distribution S02101N @ 8M

